


SAFE-T-PROBE® MODEL SP1P

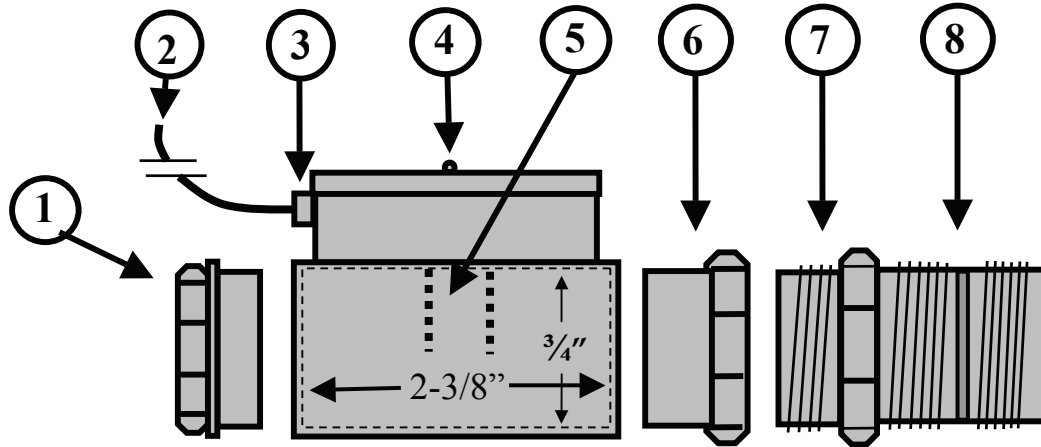

- | | |
|---|--|
| <p>① 3/4" SLIP Plug for Close Coupled Applications</p> <p>② 72"-Inch, 18AWG CMP Cable</p> <p>③ Terminals for Remote Water Sensor (Model SP1A)</p> <p>④ LED Indicator (On When Switch Opens Control circuit)</p> | <p>⑤ Water Sensor Probes</p> <p>⑥ 3/4" SLIP X 3/4" NPT Female Removable Adaptor</p> <p>⑦ 3/4" X 3/4" NPT Male Removable Adaptor</p> <p>⑧ Cutting Guide for Sizing Removable Adaptor.</p> |
|---|--|

RECTORSEAL

2601 Spenwick Dr
Houston, TX 77055
TEL #: 713-263-8001/800-231-3345 FAX: 713-263-7577
www.rectorseal.com

PART NAME:

SAFE-T-PROBE® MODEL SP1P CONDENSATE
OVERFLOW SENSOR/SWITCH

TOLERANCES: (EXCEPT WHERE NOTED)

.XX ± .020
.XXX ± .005
.XXXX ± .0005
ANG. ± 1/2°

SCALE:

NONE

DRAWN BY:

MTB

DATE:

11/28/06

DRAWING #:

SS2 C

APPROVED BY:

SPO

REVISION:

C

COMMENTS/REQUIREMENTS:

- ◆ UL 508, NFPA 90A compliant
- ◆ Schedule 40 CPVC plastic components
- ◆ -24 VAC Class 2
- ◆ -3 Amp switching capacity



LISTED
E253669